Town of Dewey-Humboldt

Typical Culvert Installation

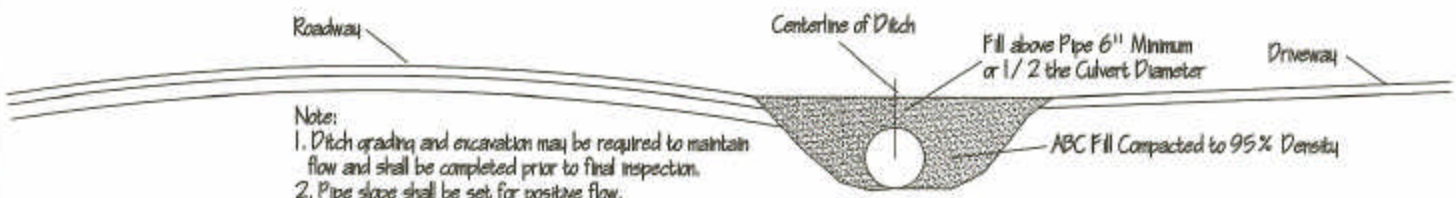

Note:
1. Ditch grading and excavation may be required to maintain flow and shall be completed prior to final inspection.
2. Pipe slope shall be set for positive flow.
3. Culvert size and slopes will be specified by the Town of Dewey-Humboldt for each location.
4. Fill around pipe shall met YAG Standards for ABC.
5. Fill shall be compacted to 95% density.